




REUSABLE CONSTRUCTION ENTRANCE

Maintenance Sheet


GENERAL INFORMATION

To ensure maximum system performance, FODS mats should be inspected and maintained as necessary.

BEFORE



IN USE

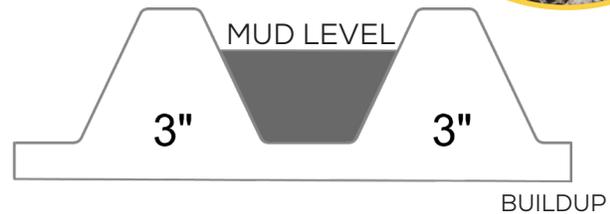

CLEANING / MAINTENANCE

Mats should be cleaned once voids between the pyramids fill up with 2.5 inches of sediment above the base of the mat. Cleaning methods vary depending on soil type and available equipment. Commonly utilized cleaning techniques are a broom attachment or the manual FODS Shovel (specifically shaped to scoop between pyramids). It is recommended that sediment should be cleaned out horizontally across the twelve foot length of the mat. Other options include a street sweeper (requires adjusted bristle head), pressure washer (must have ability to contain water), or a water truck (must have ability to contain water).

- Skid-steer broom attachment
- FODS Shovel
- Street Sweeper
- Pressure Washer
- Water Truck



CLEANING DIRECTION



AFTER CLEANING

